


Toplac Plus

Premium, High Durability Gloss Finish

Toplac Plus is a new premium gloss one part topcoat for all substrates above the waterline. Toplac Plus offers a professional quality finish that is easy to apply with exceptional roller application, without the need for tipping. The new, advanced formula provides highly durable UV protection for longer lasting gloss and color retention over time.



Product Features and Benefits

Professional Quality Finish

- Improved distinction of image (DOI) and flow over Brightside
- Enhanced UV protection for gloss and color retention
- Exceptional gloss level
- Expanded and vibrant color selection

Easier to Apply

- New formula with improved flow eliminates the need for tipping when using a roller
- No sanding between coats
- Use over Pre-Kote Plus, the new one part primer and undercoat in one, to deliver the best-in-class topcoat system
- One part topcoat = simple and easy without additives

Improved Health and Safety Profile

- Lower VOCs, no MEKO, and no diisocyanates

Additional Information

- **Technical Datasheet:**
Specific important technical information.
- **Material Safety Datasheet:**
Safety information with relation to material composition and first aid measures.
- **Boat Painting Guide:**
A comprehensive go-to guide to our whole product range.

Always read the label and product information before use. Refer to the product data sheet for more product information.

Product data

Number of coats	2-3 coats of 2-3 mil (WFT) Only 1 coat may be required for touch-up/repair
Practical coverage	By brush/roller 587 ft ² /gal per coat
Application method	Brush and roller
Thinning	The recommended level of 2333N Reducing Solvent is 5-10% by volume
Cleaning	2333N Reducing Solvent
Typical shelf life	2 years
Substrate	Suitable for all substrates
VOC	404 g/lit as supplied
Case Pack	6 quarts per case, 2 gallons per case

Please consult your Interlux representative for more information.

Available colors


Snow White YLK000 (001) ○	Mediterranean White YLK184 (545) ○	Matterhorn White YLK198 (199) ○
Off White YLK192 (193) ○	Oyster White YLK194 (195) ○	Ivory YLK187 (812) ○
Cream YLK027 (027) ○	Sundown Buff YLK237 (237) ○	Ice Blue YLK904 (904) ●
Sea Foam Green YLK256 (256) ●	Boston Whaler Blue YLK962 (962) ●	Bondi Blue YLK898 (016) ●
Lauderdale Blue YLK936 (936) ●	Sapphire Blue YLK830 (830) ●	Oxford Blue YLK993 (105) ●
Flag Blue YLK990 (992) ●	Platinum YLK151 (151) ○	Atlantic Gray YLK898 (289) ●
Anthracite Gray YLK315 (315) ●	Jet Black YKL999 (051) ●	Yellow YLK101 (101) ○
Rochelle Red YLK299 (011) ●	Bounty YLK292 (350) ●	Donegal Green YLK541 (077) ●

Recommended undercoat for one part finishes

- White Pre-Kote Plus
- Blue/Gray Pre-Kote Plus
- Blend (50% White Pre-Kote Plus/50% finish color)

Typical schemes

Above Water Schemes: One part products

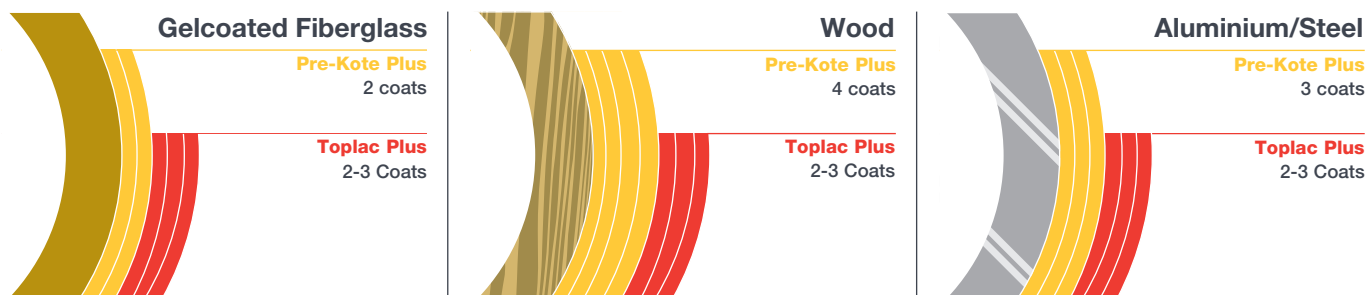

A Revolution in Topside Paint

Introducing our next generation, premium topside system with professional level results in an easy to use one part finish.

Toplac Plus provides a best in class high gloss finish with longer lasting UV protection that is easy to apply with exceptional roller application, without the need for tipping, available in a full range of vibrant colors.

Apply over Pre Kote Plus, our improved one part undercoat and topside primer all in one, with substrate protection, an extra smooth finish, and lower VOCs.

An amazing finish has never been so easy. Experience a revolution in topside paints, from Interlux.



Questions and answers

Can Toplac Plus be applied over recently applied Brightside?

Yes, with light sanding with P400.

Can Brightside be mixed with Toplac Plus?

No. To avoid wasting any Brightside you might use it either as a first coat before switching to Toplac Plus.

Can Toplac Plus be blended with Pre-Kote Plus?

Yes, follow recommendations as for Toplac Plus.

Can Toplac Plus be applied over Pre-Kote?

Yes, but the enhanced gloss and DOI levels of Toplac Plus may not be fully obtained.

Is Toplac Plus suitable for use on decks with Intergrip added, or will it be too slippery?

We would recommend the use of Interdeck for decks. Toplac Plus would present the same finish as Brightside with Intergrip added and both would have very similar levels of slip resistance. Actual levels of slip resistance would vary depending on the level of Intergrip added and how evenly it was applied.

Do Toplac Plus colors match the previous Brightside colors where the color name are the same?

Toplac Plus is not an exact match to Brightside due the new raw materials used in Toplac Plus, but as with any manufactured color you should always ensure you have the same batch number product to complete any given job. Using Brightside with Toplac Plus of the same code/color side by side for example may well show a tonal difference that can be affected by very slight color differences and

gloss levels. It is best to use any Brightside you have as a first coat, perhaps blended with Pre-Kote Plus and finish with Toplac Plus.

Can I add other products/additives to Toplac Plus?

No, you should never add any additives or materials that claim to improve specific properties of an AkzoNobel product unless it is specifically stated so on the technical data sheet or labels. Doing so would invalidate any claims for application or performance issues.

Flattening Agent for one part finishes can be used to create a variety of gloss, satin or matt effects.

Can the product be sprayed?

We do not recommend that DIY users spray the product as it is unlikely that they would have the full correct PPE equipment and suitable ventilated application areas. Professionals may decide to spray apply the product as they would have both. If sprayed Special Thinner 216 is recommended for Toplac Plus.

What equipment (roller/brush) should I use with Toplac Plus?

We recommend to use a fine, thermo-bonded foam roller. Suitable rollers are listed below:

- 4" High Density Foam Rollers (rounded edges)
- 6" Closed Cell Foam Rollers (flat edges, cut into 3" sections)
- 6" Ultra Smooth High Density Foam Rollers (rounded edges)

If a brush is required then any natural bristle brush would be recommended.

interlux.com

AkzoNobel has used its best endeavors to ensure that the information contained in this publication is correct at the time of printing. Please contact your local representative if you have any questions. Unless otherwise agreed by us in writing, any contract to purchase products referred to in this brochure and any advice which we give in connection with the supply of products are subject to our standard conditions of sale.

® Registered trademark of AkzoNobel in one or more countries. © 2023 Akzo Nobel N.V.

10083/0120